

# Hub 2.0 Specifications

## Application

The LeakSmart® Hub 2.0 is the central point of communication. With the LeakSmart Hub 2.0 your system will continue to work 24/7 even if Internet is down. If a water leak is detected in your home, the LeakSmart Hub 2.0 receives the signals from the leak sensors placed in your home and directs the LeakSmart Valve to immediately shut off your home's water supply to eliminate the threat of water damage.

## Features



- Supports Zigbee Networking
- Ethernet LAN connection
- AC power
- 2 LED status lights
- Supports multiple valves, sensors and range extenders - up to 32 devices
- 5-year manufacturer's warranty\*

## Product Specifications

- Frequency: 2405 to 2480 MHz
- Operating Voltage: 110 to 240 VAC
- Operating Temperature: -22°F - 158°F (-30°C to 70°C)
- Ethernet Cable: 6'
- Power Adapter: 6'
- Input AC Voltage: 110 to 240 VAC, 50/60 Hz
- DC Output: 5 Volt

## Materials

High performance engineered polymer

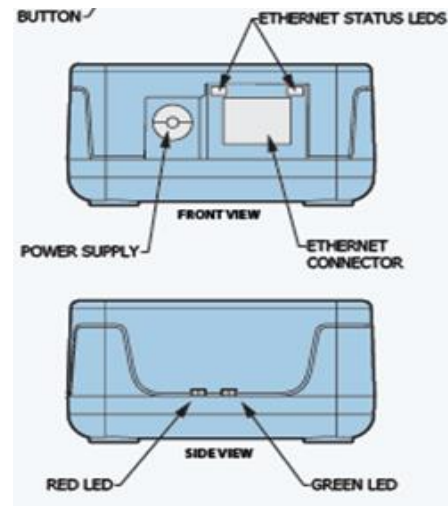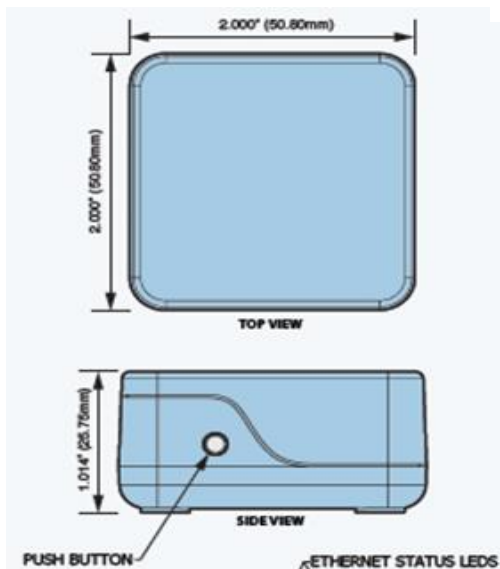

## Approvals

\* Dimensions for reference purposes only



\* 5-year manufacturer's warranty when purchased and installed by a professional installer.