

Automatic Water Shut-off Valve Specifications

Application

The LeakSmart® Shut-Off Valve connects directly to the main water supply with the patented, motorized, solid brass valve with a stainless steel stem and chrome ball that automatically shuts off the water in less than 5 seconds in the event of a leak.

Features


- Supports Zigbee Networking
- Full port valves
- Quick connect wiring
- AC power with battery back-up
- 3 LED status lights
- Automatic 22-day cleaning cycle
- 5-year manufacturer's warranty*

Product Specifications

- Frequency: 2405 to 2480 MHz
- Max. operating pressure: 150 PSI
- Max. ambient temperature: 130° F (54° C)
- Min. water temperature: 33° F (1° C)
- Max. water temperature: 190° F (88° C)
- Valve connection type: NPT
- Battery size: AA (included)
- AC Adapter: 18' power adapter cord
- Input AC Voltage: 110 to 240 VAC, 50/60 Hz
- DC Output: 9 Volt

Materials

- Control panel: High performance engineered polymer
- Valve: Lead free brass

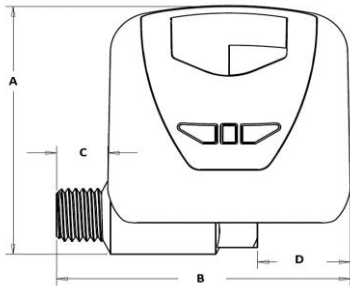

Dimensions

Valve	A	B	C	D
3/4"	4.73"	4.95"	0.87"	1.58"
1"	5.10"	4.89"	0.75"	1.10"
1-1/4"	5.89"	5.25"	1.20"	1.00"
1-1/2"	8.00"	4.24"	n/a	n/a
2"	8.657"	4.84"	n/a	n/a

* Dimensions for reference purposes only

Approvals



* 5-year manufacturer's warranty when purchased and installed by a professional installer.